

# Larniam

**5 COLOURS / 1 SIZES / 2 FINISHES / 0 SPECIAL PIECES**

With contemporary colour choices and both matt and gloss finishes, Larniam allows you to experiment by mixing and matching colours and finishes or choosing your favourite colour but experimenting with laying patterns to create your perfect feature wall. This range contains 15% recycled content.



Larniam



Larniam



# Larniam



WHITE




BONE



DOVE



ROSE

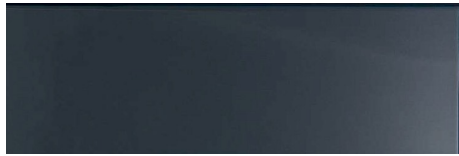

MIDNIGHT

Ceramic	7mm thick	Wall/floor	Interior/exterior
	Matt/Gloss	All tiles	All tiles
100x300	P	Wall	Interior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Larniam



100x300

## GROUP / BIII - CERAMIC

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±10% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.3% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	E b ≤ 10%	E b ≤ 10%
Breaking strength	ISO 10545-4	≥ 200N	≥ 200N
Modulus of rupture	ISO 10545-4	Ave min 12 N/mm <sup>2</sup>	Ave min 12 N/mm <sup>2</sup>
Thermal shock resistance	ISO 10545-1	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-	Declare Value	Gloss GLB, Matt GLC
Resistance to stain	13 ISO	Min Class 3	Class 3
Reaction to fire	10545-14	Class A1 A1/FL	A1 A1/FL

Recycled content Larniam	%
	1

5

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles