

Messina

6 COLOURS / 1 SIZE / 1 FINISH / 0 SPECIAL PIECES

Messina is a porcelain 5.3x30cm range with a soft semi-matt glaze which creates a wave-like movement on the surface. Slightly irregular edges makes the collection look handmade while still maintaining an easy installation.




Messina



Messina



Messina

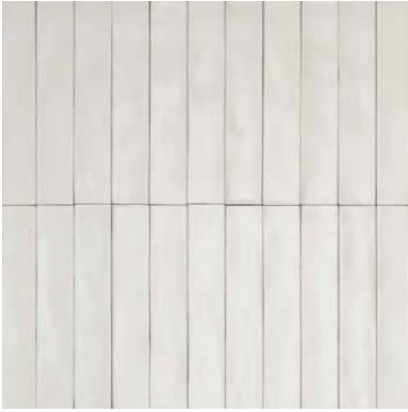

Messina Bone



Messina Grey Blue



Messina Artichoke



Messina Brick



Messina Mustard



Messina Black

Porcelain	10mm thick	Wall/floor	Interior/exterior
	Satin	All tiles	All tiles
53x300	✓	Wall Only	Interior & Exterior Walls



53x300x10

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Messina

GROUP / BLa - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% - ±2mm	Conforms
Thickness	ISO 10545-2	±5% - ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% - ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% - ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% - ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	35 N/mm ²
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1

Recycled Content	23 %
Range Name	Messina

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles