

# Stax

9 COLOURS / 1 SIZE / 1 FINISH

Stax is a range of 20x20cm pre-scored tiles that mimic a much smaller format while allowing for an easier fit. With 9 colours, 4 of which are stocked in the UK, Stax is a great option to brighten up a space.



# Stax




WHITE

GREIGE

CORAL

FERN

EMERALD

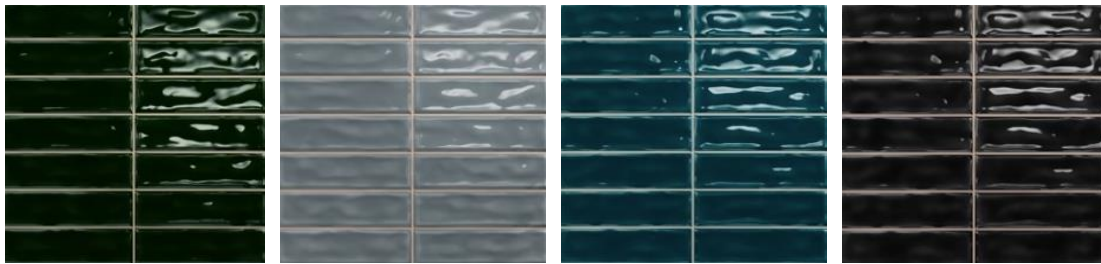

GREEN INTENSE

BLUE MIST

BLUE

BLACK

|         |             |            |                   |
|---------|-------------|------------|-------------------|
|         | 6.8mm thick | Wall/floor | Interior/exterior |
| Ceramic | Gloss       | All tiles  | All tiles         |
| 200x200 | ✓           | Wall Only  | Interior Only     |



The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Stax

## GROUP / BIII - CERAMIC

|   | Standard     | Requirement                      | Established Values    |
|---|--------------|----------------------------------|-----------------------|
| Length and Width  | ISO 10545-2  | ±0.5% ~ ±2mm                     | Conforms              |
| Thickness   | ISO 10545-2  | ±5% ~ ±0.5mm                     | Conforms              |
| Straightness  | ISO 10545-2  | ±0.5% ~ ±1.5mm                   | Conforms              |
| Flatness  | ISO 10545-2  | ±0.5% ~ ±2.0mm                   | Conforms              |
| Rectangularity  | ISO 10545-2  | ±0.5% ~ ±2.0mm                   | Conforms              |
| Water Absorption  | ISO 10545-3  | Eb >10%                          | 15 %                  |
| Breaking Strength   | ISO 10545-4  | ≥ 600N                           | ≥ 600N                |
| Modulus of Rupture  | ISO 10545-4  | Ave Minimum 12 N/mm <sup>2</sup> | >23 N/mm <sup>2</sup> |
| Thermal Shock Resistance                                  | ISO 10545-9  | Pass according to EN ISO 10545-1 | Resistant             |
| Resistance to household chemicals and swimming pool salts | ISO 10545-13 | Min Class GB                     | GA                    |
| Resistance to high concentrations of alkalis and acids    | ISO 10545-13 | Declare Value                    | GHA                   |
| Resistance to low concentrations of alkalis and acids     | ISO 10545-13 | Declare Value                    | GLA                   |
| Resistance to Stain                                       | ISO 10545-14 | Min Class 3                      | Class 5               |
| Reaction to Fire  |              | Class A1 A1/FL                   | Class A1              |

|                  |      |
|------------------|------|
| Recycled Content | 25 % |
| Range Name       | Stax |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles