

Contrax

5 COLOURS / 4 SIZES / 1 FINISH


Contrax is a go-to range which ticks all the boxes for commercial environments. 5 colours, 4 sizes, a subtle design and a PTV+36 finish make this range suitable for any space. The 33x33cm is non-rectified, the other sizes are rectified.



Contrax



Contrax

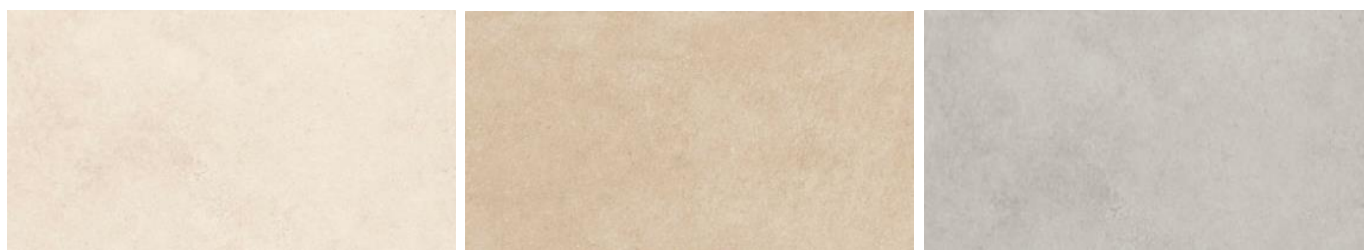

NATURAL

BEIGE

LIGHT GREY



GREY

ANTRACHITE

Porcelain	8.5mm thick	Wall/floor	Interior/exterior
	Matt	All tiles	All tiles
330x330	✓	Wall & Floor	Interior & Exterior
300x600	✓	Wall & Floor	Interior & Exterior
600x600	✓	Wall & Floor	Interior & Exterior
600x1200	✓	Wall & Floor	Interior & Exterior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Contrax 30x60 rectified

GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	2200N
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	52 N/mm ²
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare Value	6179 – PEI 4 6180 – PEI 4 6181 – PEI 4 6182 – PEI 3 6278 – PEI 2
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✓

Recycled Content	0 %
Range Name	Contrax

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Contrax 33x33 Pressed

GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	1347N
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	61 N/mm ²
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare Value	6555 – PEI 3 6556 – PEI 3 6557 – PEI 3 6558 – PEI 2
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✓

Recycled Content	0 %
Range Name	Contrax

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles