

Spectre

4 COLOURS / 1 SIZES / 3 FINISHES / 0 SPECIAL PIECES


Spectre investigates the reactions of light on different glaze applications. The holographic finish is capable of drawing the light spectrum, a glossy surface that takes on different colours with the changing of light. Available in 50x250, Spectre includes 4 colours: Milk, Cream, Sky and Rose. Each colour has both a matt, gloss and a holographic finish that creates an iridescent visual rhythm and redefines contemporary surfaces. Inside each Hologram mix box there is a 24% Hologram finish, a 38% Matte finish and a 38% Glossy finish.



Spectre



Spectre

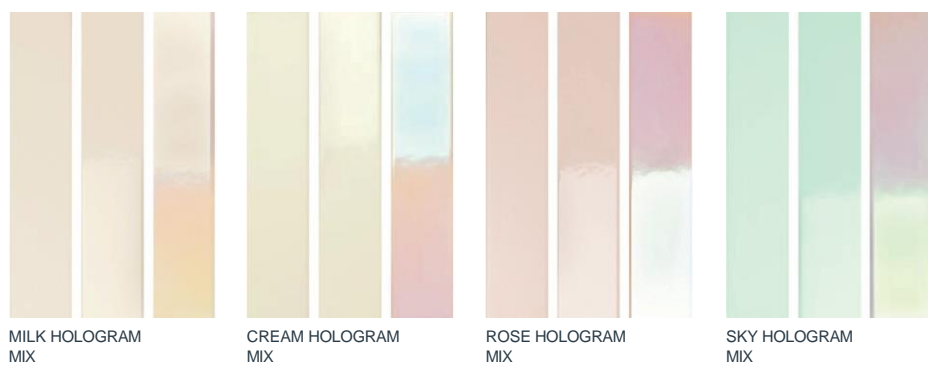

Ceramic	10mm thick	Wall/floor	Interior/exterior
	Matt	All tiles	All tiles
50x250	✓	Wall	Interior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Spectre



50x250

GROUP / BIII - CERAMIC

Range	Standard	Requirement	Established Values
Length and width	ISO 10545-2	±0.5% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±10% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.3% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_w \leq 10\%$	Ave 16%
Breaking strength	ISO 10545-4	$\geq 600N$	$\geq 600N$
Modulus of rupture	ISO 10545-4	Ave min 12 N/mm ²	Ave min 12 N/mm ²
Thermal shock resistance	ISO 10545-1	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to stain	ISO 10545-14	Declare Value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled Content	73 %
Range Name	Spectre

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles