


Bastoni Oval

7 COLOURS / 1 SIZE / 2 FINISHES

Bastoni Oval is a unique oval shaped mosaic available in 7 colours. Each mosaic chip is 23x89x6mm.



Bastoni Oval

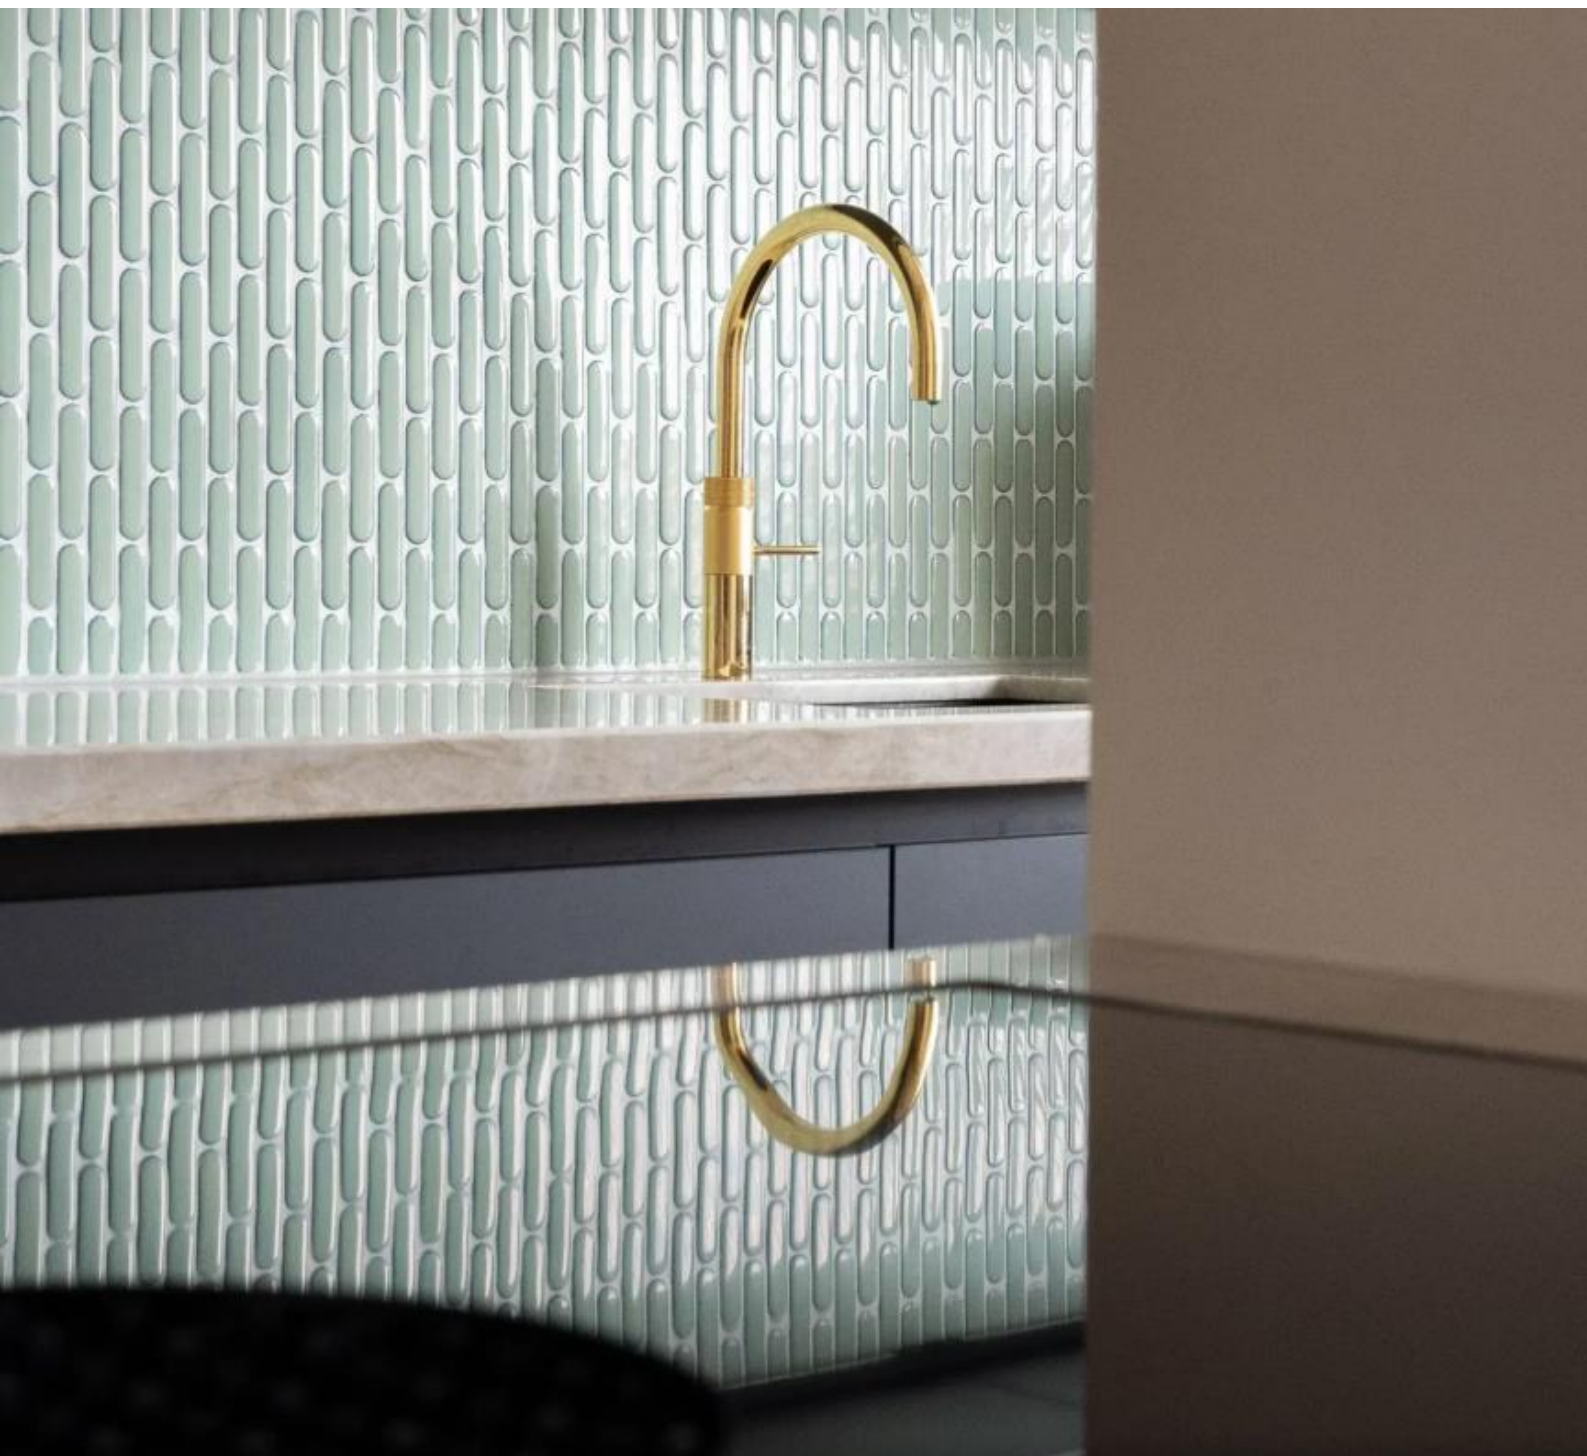


Bastoni Oval




WHITE OVAL GLOSS



WHITE OVAL MATT

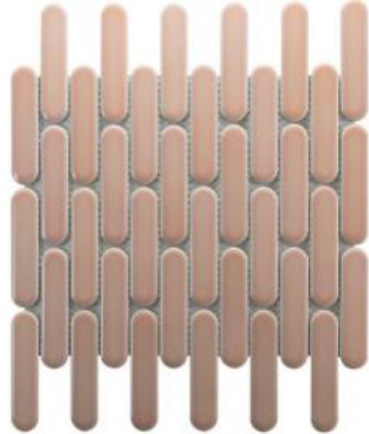


PINK OVAL GLOSS

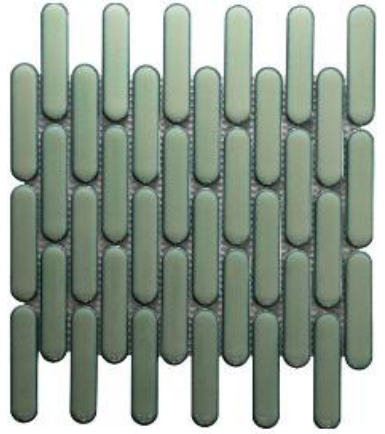


LIGHT GREEN SPECKLE OVAL GLOSS



AZURE BLUE SPECKLE OVAL GLOSS

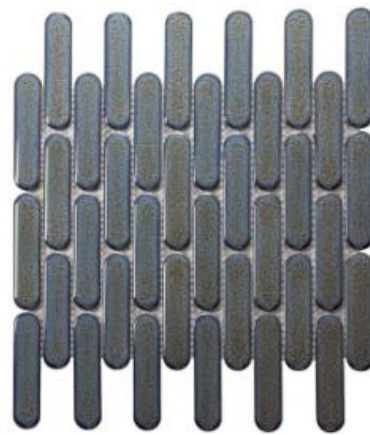

GREY BLUE SPECKLE OVAL GLOSS

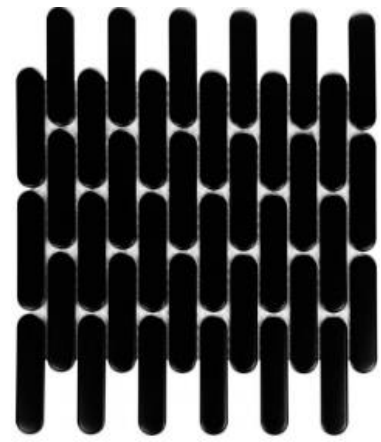

BLACK OVAL MATT

Porcelain	6mm thick		Wall/floor	Interior/exterior
	Matt	Gloss	All tiles	All tiles
300x300	✓	✓	Wall Only	Interior Only

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Bastoni Oval

GROUP / Bia - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	$\pm 0.6\% - \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% - \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% - \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% - \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% - \pm 2.0\text{mm}$	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	Ave 0.13%
Breaking Strength	ISO 10545-4	$\geq 1300\text{N}$	1719N
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	49.5 N/mm ²
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare Value	PEI 3
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1

Recycled Content	0 %
Range Name	Bastoni